

高速全自动糊盒(箱)机

HIGH SPEED AUTOMATIC FOLDER GLUER JH-1200/1450/1700/2100/2300/2800/3200

JH-1450-PC-F




送纸部 Feeding unit

送纸部由独立电机调速驱动系统，真空吸风带，保证纸板输送精确、稳定。
Sheet feeding is driven by independent motor. The vacuum suction belt ensures the accuracy and stability of sheet conveying.

纸张修正部 Sheet correction unit

送纸部送出的纸板经过修正部能纠偏导正，确保输送精度，上压驱动能上下调节，以适应不同纸板厚度。
Auto-correction unit ensures feeding accuracy. Adjustable upper pressing drive is suitable for different thickness sheet.

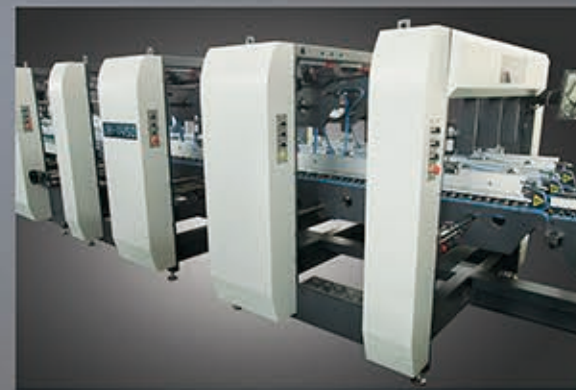

勾底部+后追模块 Bottom lock and 4/6 corner system

专门设计后追机构，采用高精度伺服控制系统驱动，实现底部、前勾后追等特殊折叠功能，能满足各种导形盖、四角/六角盒功能。
Specially designed 4/6 corner system, which is driven by high-precision servo control system. Thus realizes special folding functions such as bottom, front lock and 4/6 corner, which can meet the functions of various covers and 4/6 corner boxes.

成型部 Folding unit

特有超长本折模块，使纸板在此功能充分舒展后顺势展成型，左右输送带速度可单独调节，以校正箱坯确保直线输送。
Unique elongated folding module enables the cardboard to be stretched into shape. The speed of the left and right conveyor belts can be adjusted separately, which ensures straight conveying by correcting the box.




压着部 Trombone (pressing) unit

上下带可前后移动调节，配有修边校正装置，塞纸检测装置。
Adjustable upper and lower belts, works together with correction device and jamming detecting device.

输送部 Conveying unit

进入收纸部前进行拍齐修正定位，再次确保已成型箱无喇叭口现象。
Correction positioning before conveying unit, helps to avoid from improper gluing.

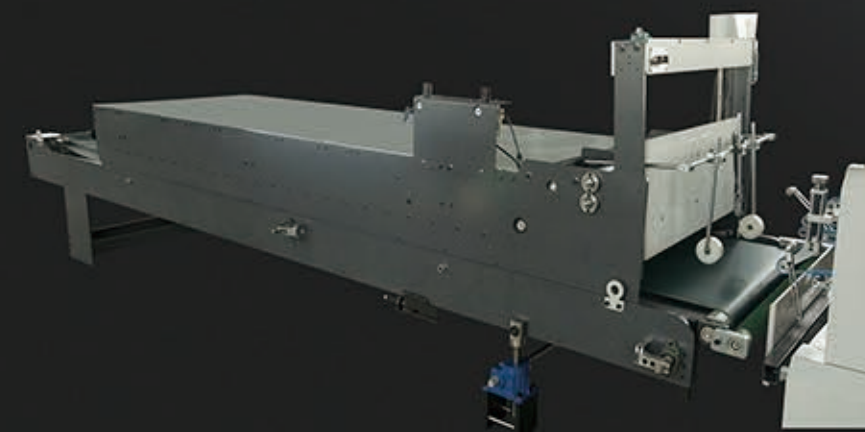

基础平面图 FLOOR PLAN



性能规格 SPECIFICATIONS

Model性能/机型	JH1200	JH1450	JH1700	JH2100	JH2300	JH2800	JH3200
MAX. SHEET SIZE 最大纸张尺寸	1200×1300mm	1450×1300mm	1700×1300mm	2100×1300mm	2300×1300mm	2800×1300mm	3200×1300mm
MIN. SHEET SIZE 最小纸张尺寸	420×180mm	420×180mm	420×180mm	520×180mm	520×180mm	520×180mm	520×240mm
APPLICABLE PAPER 适用范围	卡纸300g 瓦楞纸F、E、C、B、A、EE、AB cardboard:300g-800g, corrugated paperF、E、C、B、A、EE、AB						
MAX. BEIT SPEED 最大皮带速度	250M/min	250M/min	250M/min	250M/min	250M/min	250M/min	250M/min
MACHINE LENGTH 机器长	23000mm	23000mm	23000mm	23000mm	23000mm	23000mm	23000mm
MACHINE WIDTH 机器宽	2400mm	2700mm	2900mm	3400mm	3600mm	4200mm	4800mm
MACHINE HEIGHT 机器高	2000mm	2000mm	2000mm	2000mm	2000mm	2000mm	2000mm
TOAI POWER 总功率	42KW	42KW	45KW	45KW	45KW	45KW	60KW
MAX. AIR DISPLACEMENT 最大排气量	0.7m³/min	0.7m³/min	0.7m³/min	0.7m³/min	0.7m³/min	0.7m³/min	0.7m³/min
TOTAL WEIGHT 总重量	15000kg	15500kg	16000kg	16500kg	17000kg	18000kg	20000kg

由于技术升级，景宏保留权利修改有关参数及功能，恕不另行通知。
Due to technical upgrade, Jinghong reserves the right to modify relevant parameters and functions without prior notice.

- C=一般两折箱及两侧贴边。
C type= standard folding box, double-wall box.
- AC=一般两折箱及两侧贴边两侧勾底。
AC type = standard folding box, double-wall box and bottom lock device.
- PCW=一般两折箱及两侧贴边及勾底四角、六角纸箱。
PCW type = standard folding box, double-wall box, bottom lock device and 4/6 corner box.
- 本目录仅供参考用，特殊形式可另外设计。
This catalogue is for general reference only. Special design is also available.