
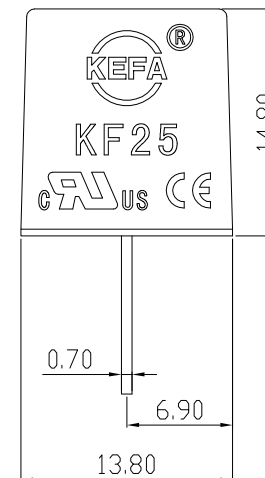


PCB LAYOUT

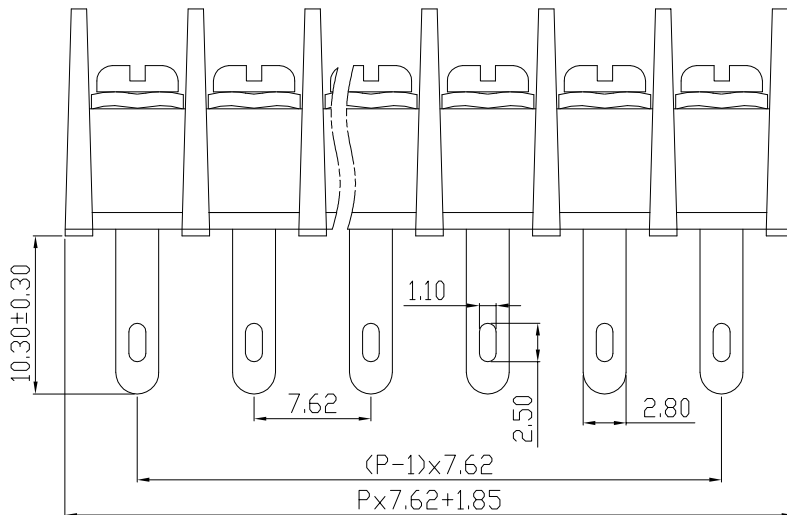

UL/CUL	技术 参数			
UL/CUL	Technical Data			
等 级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	-
额定电流	Rated Current [A]	20	-	-
接线范围	Wire Range	22-12		
单/多芯线	Solid/Stranded [AWG]			
IEC 技术参数				
IEC Technical Data				
额定电压	Rated Voltage [V]	250		
额定电流	Rated Current [A]	24		
耐电压	Withstanding Voltage [V/1Min]	AC2000V/1Min		
导线截面积	Conductor cross section	2.5		
硬质/柔性导线	Solid/ flexible [mm ²]			
材 料				
绝缘材料	Insulation Material	PA66		
阻燃等级	Imflammability	UL94V-0		
导体材料	Contactore Material	铜合金 Copper alloy		
导体表面镀层	Contactive Coating	镀锡 Tin Plated		
一般参数 Other Data				
间距 Pitch	[mm]	7.62		
极数 Poles	[P]	02~24		
剥线长度 Stripping Length	[mm]	-		
螺丝 Screw/扭矩 Torque(Max)	[N.m]	M3/0.8		
工作温度 Operating temperature	[°C]	-40~+105		
引针尺寸 Pin Dimensions	[mm]	10.3		
PCB板孔径 PCB Hole Diameter	[mm]	3.1		

DES.	LQQ	DATE	21.09.11	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION		版本 / REV	A
CHK.	BY	DATE	21.09.11	 慈溪市科发电子有限公司 CIXI KEFA ELECTRONIC CO., LTD									
APP.	CLF	DATE	21.09.11							名称 / TITLE	KF25H-7.62		