

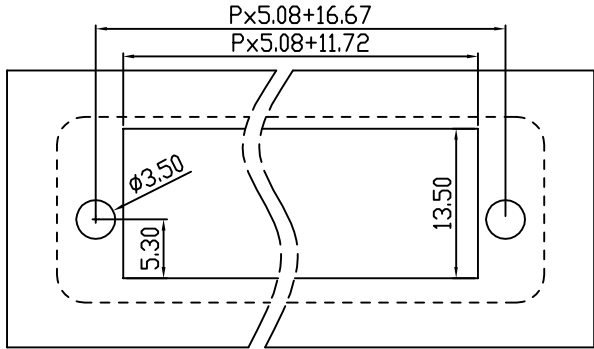
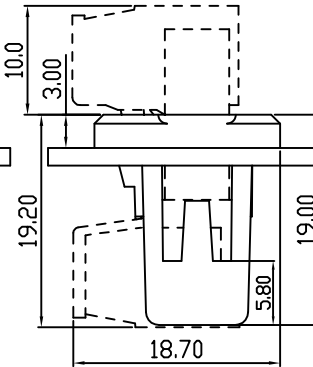


linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

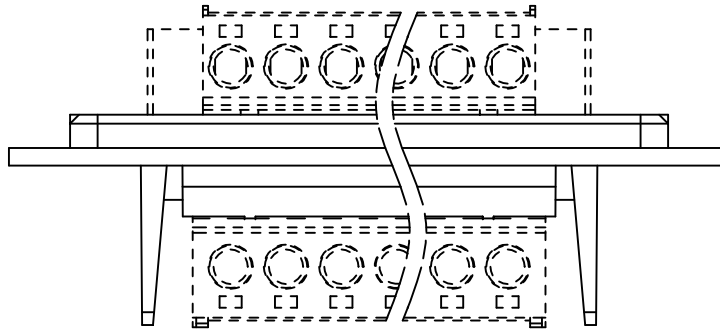


PCB LAYOUT

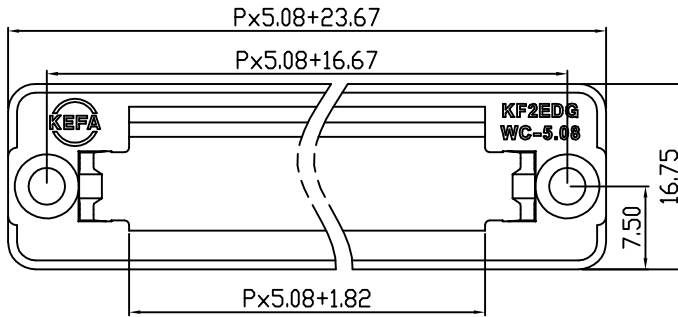

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	24.08.24

UL/CUL 技术 参数 UL/CUL Technical Data						
等级	Use Group		B	C	D	
额定电压	Rated Voltage	[V]	-	-	-	
额定电流	Rated Current	[A]	-	-	-	
接线范围	Wire Range		-			
单/多芯线	Solid/Stranded	[AWG]				
耐电压	Withstanding Voltage		-			
IEC 技术参数 IEC Technical Data						
过电压类别	Overvoltage Category		III	III	II	
污染等级	Contamination Class		3	2	2	
额定电压	Rated Voltage	[V]	-	-	-	
额定电流	Rated Current	[A]	-	-	-	
额定冲击电压	Impulse withstand voltagea	[KV]	-	-	-	
导线截面积	Conductor cross section		-			
硬质/柔性导线	Solid/ flexible	[mm²]				
材 料 Material						
绝缘材料	Insulation Material		PA66			
阻燃等级	Imflamability					
导体材料	Contactur Material		-			
导体表面镀层	Contactive Coating		-			
一般参数 Other Data						
间距	Pitch	[mm]	5.08			
极数	Poles	[P]	2-24			
剥线长度	Stripping Length	[mm]	-			
螺丝	Screw/扭矩	Torque(Max)	[N.m]			
工作温度	Operating temperatur	[°C]	-40~+105			
引针尺寸	Pin Dimensions	[mm]	-			
PCB板孔径	PCB Hole Diameter	[mm]	-			

DES.	FGG	DATE	24.08.24	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION		版本 /	A
CHK.	CLF	DATE	24.08.24	 慈溪市科发电子有限公司 CIXI KEFA ELECTRONICS CO., LTD								REV	
APP.	CLF	DATE	24.08.24							名称 /		KF2EDGWC-5.08	
				TITLE									