RUNLUX | 8FT LED Vapor tight fixture

8FT LED vapor tight linear fixture



Features

- IP66 LED module waterproof luminaire
- IK10 Rating.
  NSF for food processing facilities.
- Input: AC120-277V, 50/60HZ, 120-347V as optional.
- Ideal for car washes, tunnels and stairwells etc.
- Lifetime: Limited 5 years
- 8FT Length
- DLC Premium


Advantage

- Quick-mount, surface, stainless steel spring clips supplied.
- Diffuse polycarbonate lens for low glare and maximum protection
- Built-in sensor, external sensor is optional.
- Emergency battery back up available.
- Work in -40°C ~+40°C temp.

Model Selection

Model Number	Power	Lumen	Efficacy	Ra	Dimming	CCT	Ambient Temp.	Size (mm)	Cert
R2-8VTC65WDyyy-xxK	65W	8450	130	80	0-10v Dimming	4000K 5000K	-35℃ ~ 40℃	2440x103.5x77.5	ETL+ DLC premium
R2-8VTC100WDyyy-xxK	100W	13000	130	80	0-10v Dimming	4000K 5000K	-35℃ ~ 40℃	2440x103.5x77.5	ETL+ DLC premium

Dimension:

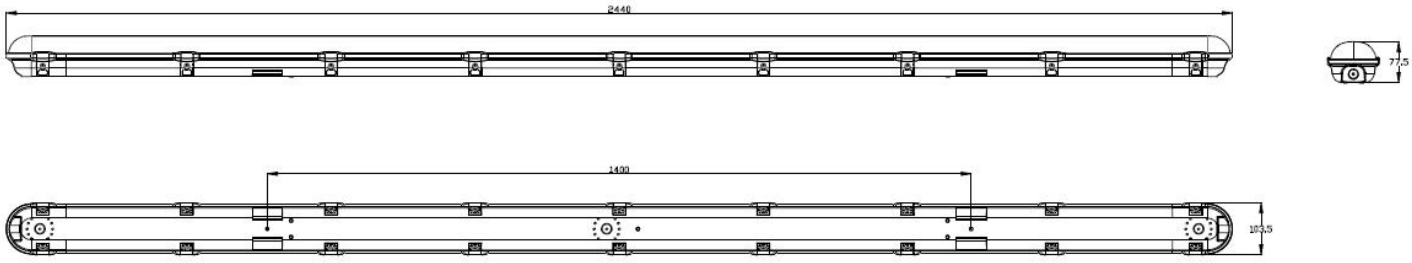

Phone:+86-21-68979033 | Fax:+86-21-58654108 | Web:www.runluxled.com | Email:sales@runluxled.com

RUNLUX | 8FT LED Vapor tight fixture

Specifications

Item	Specification	Model	
		R2-8VTC65WDyyy-xxK	R2-8VTC100WDyyy-xxK
General Performance	Power Consumption	65W	100W
	Lumens Delivered	8450	13000
	Efficacy(lm/w)	130	
	CRI	≥80	
	Color Temp.	4000K, 5000K	
	Lifetime(H)	50,000	
	Size	96.06"*4.07"*3.05"(2440x103.5x77.5mm)	
	Power Factor	≥0.9	
	Input voltage	120-277V standard (120-347V as optional)	
Physical	Housing	PC	
	Humidity	20%-85% RH, non-condensing	
Certification	Certification	ETL, cETL, DLC Premium, IP66, IK10	
	Material usage	RoHS compliant; no mercury	
	Environment	Wet location listed	
	Warranty	5 years limited	

Motion Sensor



External motion sensor
120-347V or 120-277V
15m Height Max



Built-in motion sensor
120-277V Only
6m Height Max



Built-in motion sensor
120-277V Only
6m Height Max

Shipping information

Model	Watts	Pcs/Carton	20GP	40GP	40HQ
R2-8VTC65WDyyy-xxK	65W	1pc/Carton	1040pcs	2200pcs	2600pcs
R2-8VTC100WDyyy-xxK	100W	1pc/Carton	1040pcs	2200pcs	2600pcs

Phone:+86-21-68979033 | Fax:+86-21-58654108 | Web:www.runluxled.com | Email:sales@runluxled.com