RUNLUX | 4FT LED Vapor tight fixture/High watt

4FT High Watt (DLC As high bay)

LED vapor tight linear fixture



Features

- IP66 LED module waterproof luminaire
- IK10 Rating.
- Input: AC120-277V, 50/60HZ, 120-347V as optional.
- Ideal for car washes, tunnels and stairwells etc.
- Lifetime: Limited 5 years
- DLC Premium application as **High bay**


Advantage

- Quick-mount, surface, stainless steel spring clips supplied.
- Diffuse polycarbonate lens for low glare and maximum protection
- Built-in sensor, external sensor is optional.
- Emergency battery back up available.
- Work in -40°C ~+40°C temp.

Model Selection

Model Number	Power	Lumen	Efficacy	Ra	Dimming	CCT	Ambient Temp.	Size (mm)	Cert
R2-4VTC100WDyyy-xxK	100W	8450	130	80	0-10v Dimming	4000K 5000K	-40℃ ~ 40℃	1270x254x115	ETL+ DLC premium
R2-4VTC150WDyyy-xxK	150W	13000	130	80					
R2-4VTC200WDyyy-xxK	200W	26000	130	80					

Dimension:

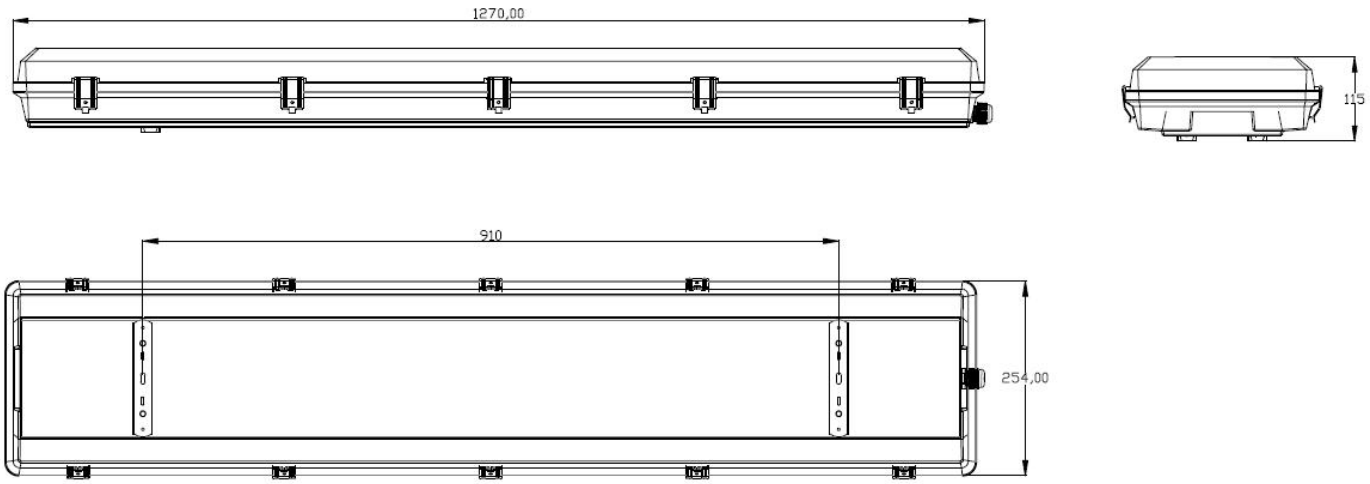

Phone:+86-21-68979033 | Fax:+86-21-58654108 | Web:www.runlux.net | Email:sales@runlux.net
Revised 2019/7/25

RUNLUX | **4FT LED Vapor tight fixture/High watt**


Specifications

Item	Specification	Model		
		R2-4VTC100WDyyy-xxK	R2-4VTC150WDyyy-xxK	R2-4VTC150WDyyy-xxK
General Performance	Power Consumption	100W	150W	200W
	Lumens Delivered	13000	19500	26000
	Efficacy(lm/w)	130		
	CRI	80		
	Color Temp.	4000K, 5000K		
	Lifetime(H)	50,000		
	Size	50.00"*10.00"*4.52"(1270x254x115mm)		
	Power Factor	≥0.9		
	Input voltage	120-277V standard (120-347V as optional)		
Physical	Housing	PC		
	Humidity	20%-85% RH, non-condensing		
Certification	Certification	ETL, cETL, DLC Premium, IP66, IK10		
	Material usage	RoHS compliant; no mercury		
	Environment	Wet location listed		
	Warranty	5 years limited		

Motion Sensor



External motion sensor
120-347V or 120-277V
15m Height Max



Built-in motion sensor
120-277V Only
15m Height Max

Shipping information

Model	Watts	Pcs/Carton	20GP	40GP	40HQ
R2-4VTC100WDyyy-xxK	100W	1pc/Carton	470pcs	940pcs	1100pcs
R2-4VTC150WDyyy-xxK	150W	1pc/Carton	470pcs	940pcs	1100pcs
R2-4VTC200WDyyy-xxK	200W	1pc/Carton	470pcs	940pcs	1100pcs

Phone:+86-21-68979033 | Fax:+86-21-58654108 | Web:www.runlux.net | Email:sales@runlux.net
Revised 2019/7/25