LED Vapor Tight Linear Fixture

Classic 4FT



Features

- IP66 LED module waterproof luminaire
- IK10 Rating.
- NEMA 4X , NSF certificated.
- Input: AC120-277V, 50/60HZ, 120-347V as optional.
- Perfect replacement for the whole set of T8 fluorescent luminaire
- Lifetime: Limited 5 years by DLC premium


Advantage

- Metal lock is more stable than plastic lock
- One-piece design and lifting handle makes installation easier and save labor cost
- The slot is wider, the position of installation is flexible.
- Built-in sensor is optional. Emergency battery back up available.
- Work in -40°C ~+40°C temp.

Model Selection (Remark: non-dimmable is optional)

Model Number	Power	Lumen	Efficacy	Ra	Dimming	Ambient Temp	Size (mm)	Cert
R2-4VTM36WD-XXK	36w	4680	130	80	0-10V Dimmable	-40℃ ~40℃	1160*120*109	ETL+ DLC premium
R2-4VTM46WD-XXK	46w	5980	130	80				
R2-4VTM65WD-XXK	65w	8450	130	80				
R2-4VTM32WD-XXK	32w	4160	130	80				
R2-4VTM42WD-XXK	42w	5460	130	80				Low bay in DLC listing

Drawing

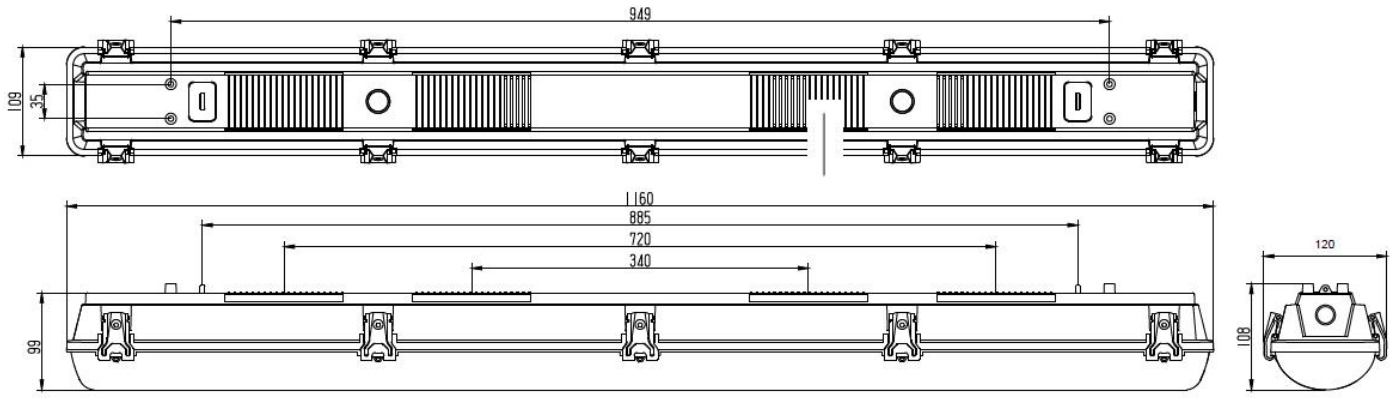

Phone:+86-21-68979033 | Fax:+86-21-58654108 | Web:www.runlux.net | Email: info@runlux.net

RUNLUX | **LED Vapor Tight Fixture/Classic 4FT**

Specifications

Item	Specification	Model		
		R2-4VTM36WD-XXK	R2-4VTM46WD-XXK	R2-4VTM65WD-XXK
General Performance	Power Consumption	36W	46W	65W
	Lumens Delivered	4680	5980	8450
	Efficacy(lm/w)	130		
	CRI	80		
	Color Temp.	4000K, 5000K		
	Lifetime(H)	50,000		
	Size	45.66"*4.72"*4.29"(1160*120*109mm)		
	Power Factor	≥0.9		
	Input voltage	120-277V standard (120-347V as optional)		
Physical	Housing	PC		
	Humidity	20%-85% RH, non-condensing		
Certification	Certification	ETL, cETL, DLC Premium, NEMA 4X, NSF IP66, IK10		
	Material usage	RoHS compliant; no mercury		
	Environment	Wet location listed		
	Warranty	5 years limited		

Motion Sensor



External motion sensor
120-347V or 120-277V
15m Height Max



Built-in motion sensor
120-277V Only
6m Height Max



Built-in motion sensor
120-277V Only
6m Height Max

Shipping information

Model	Watts	Pc/inner	Pcs/Carton	20GP	40GP	40HQ
R2-4VTM36WD-XXK	36W	1pc/inner	4inner/Carton	1440pcs	2880pcs	3200pcs
R2-4VTM46WD-XXK	46W					
R2-4VTM65WD-XXK	65W					
R2-4VTM32WD-XXK	32W					
R2-4VTM42WD-XXK	42W	1pc/inner	4inner/Carton	1440pcs	2880pcs	3200pcs

Phone:+86-21-68979033 | Fax:+86-21-58654108 | Web:www.runlux.net | Email: info@runlux.net